


HKL14-马达左接（200W、400W）

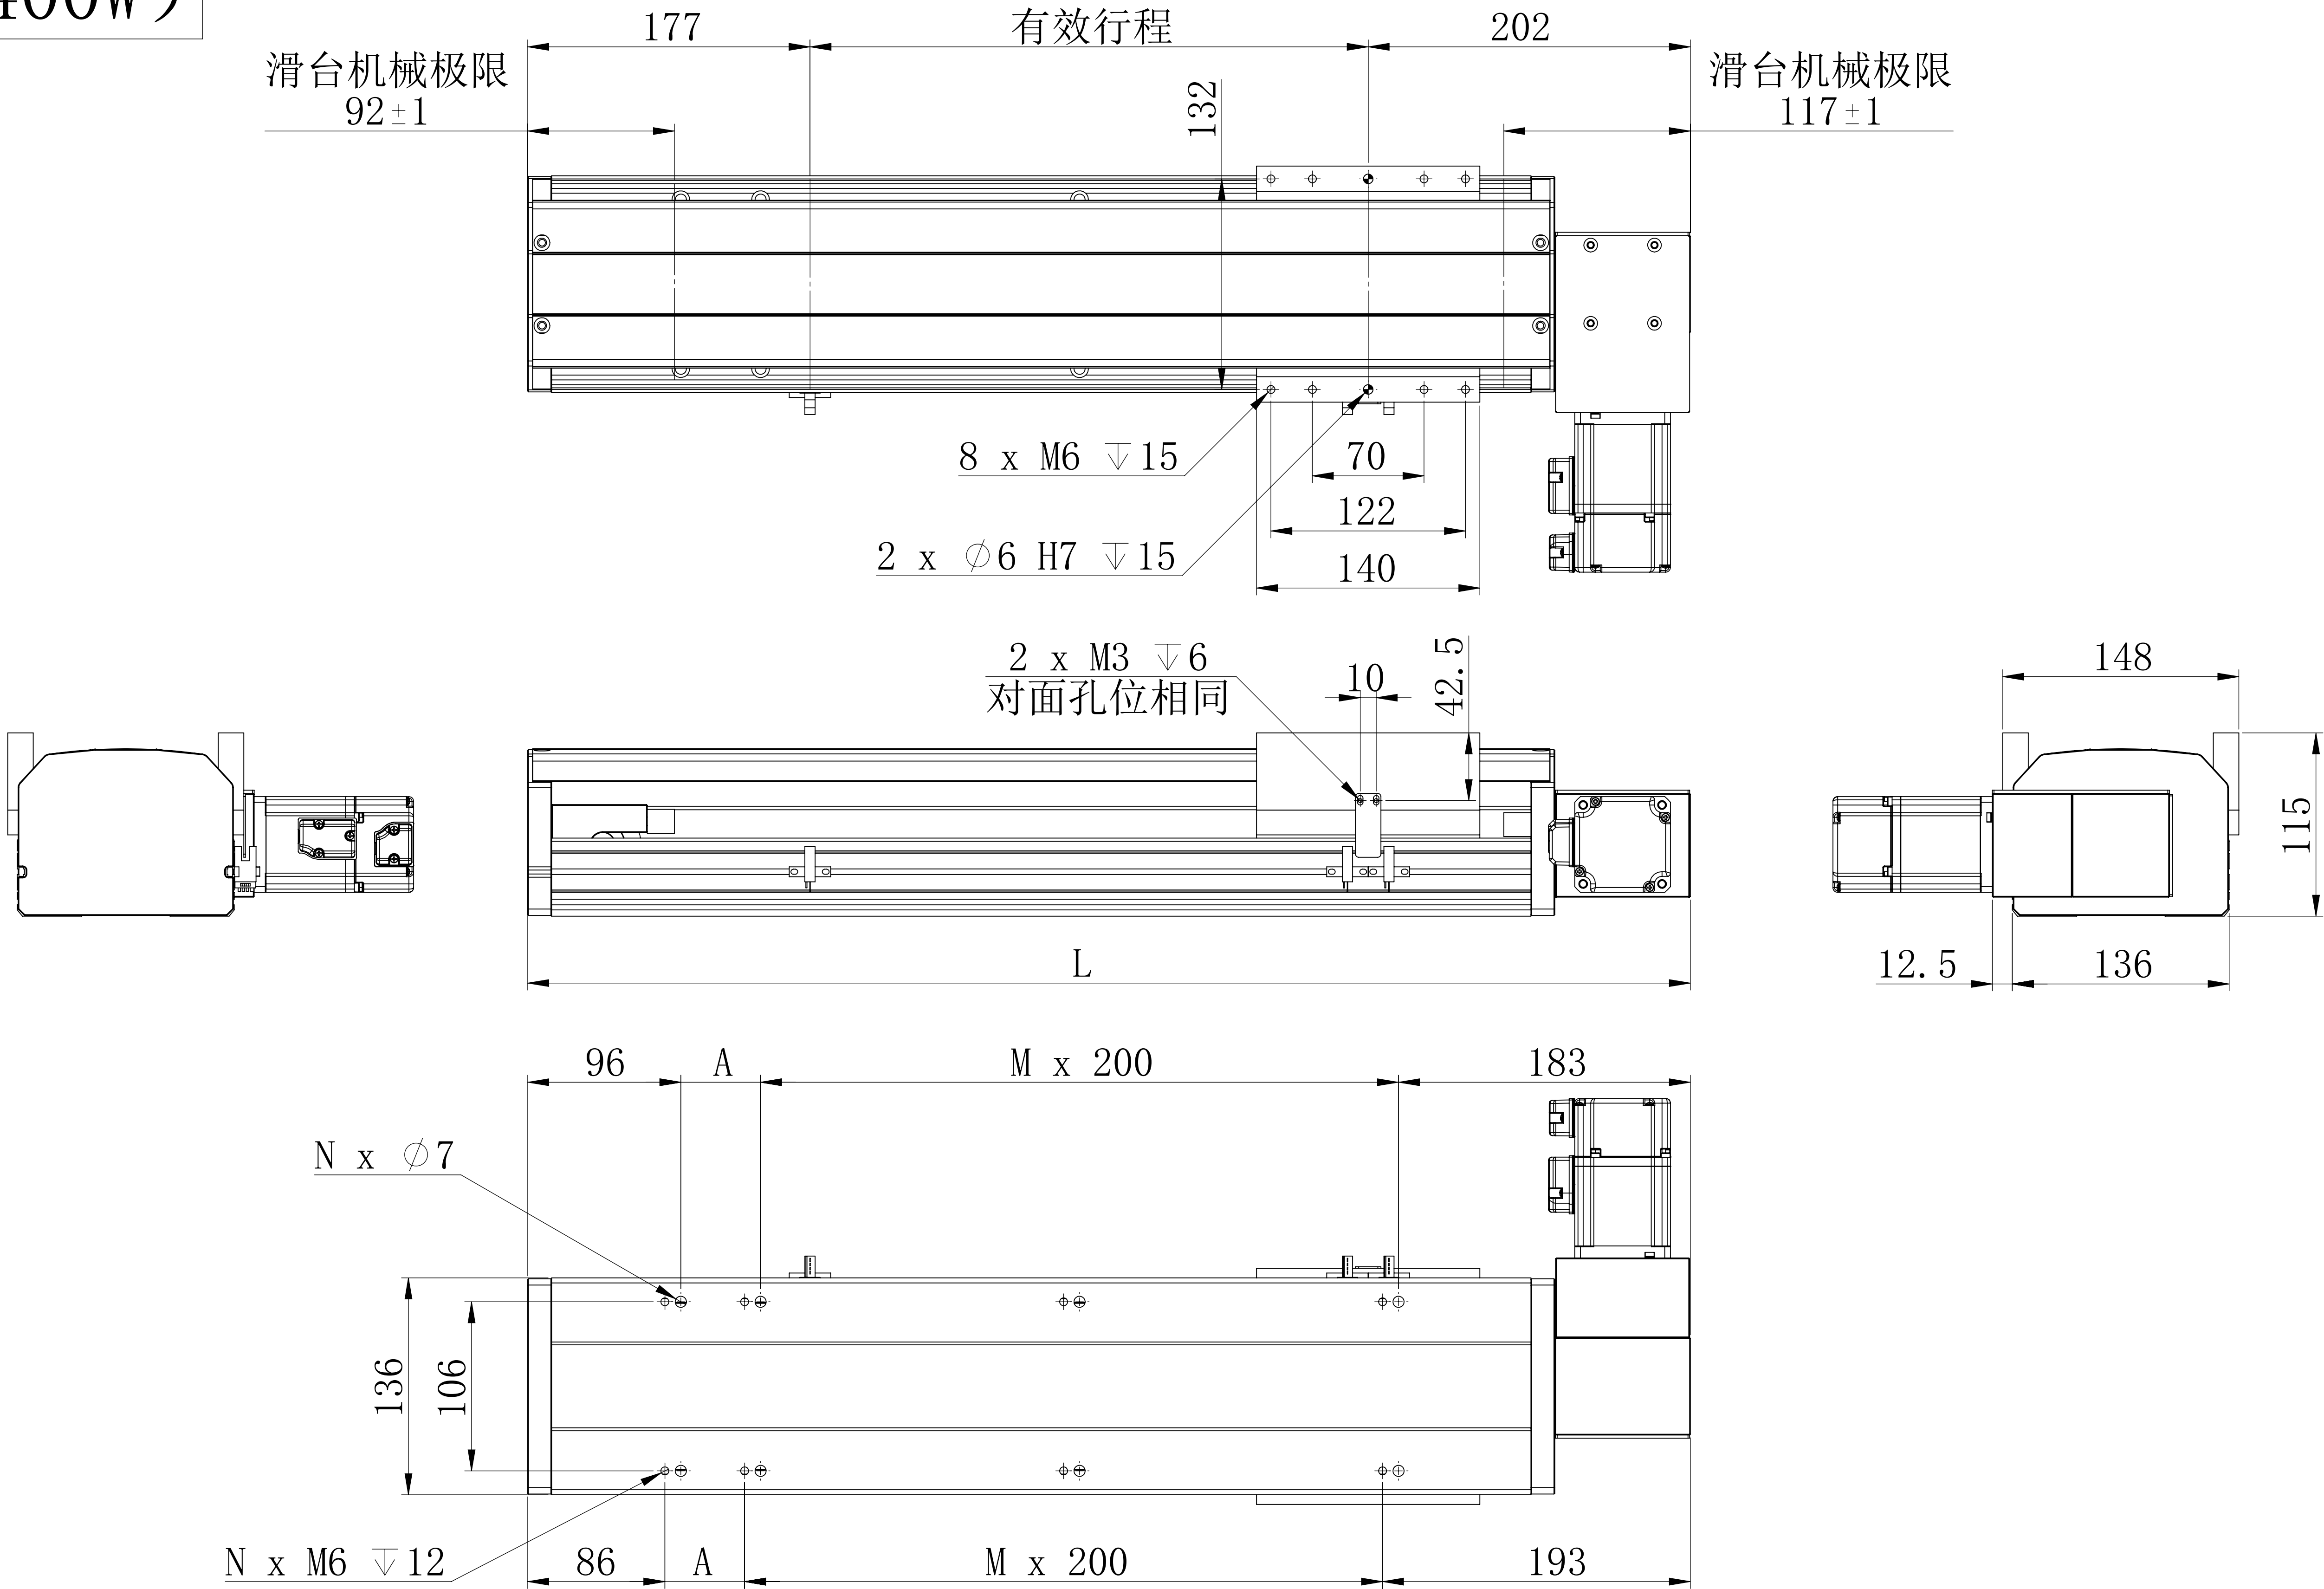

注：模组禁止垂直使用(无需精度时可垂直使用，负载降低)；

|           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 有效行程 (mm) | 100  | 150  | 200  | 250  | 300  | 350  | 400  | 450  | 500  | 550  | 600  | 650  | 700  | 750  | 800  | 850  | 900  | 950  | 1000 | 1050 | 1100 | 1150 | 1200 | 1250 |
| L         | 479  | 529  | 579  | 629  | 679  | 729  | 779  | 829  | 879  | 929  | 979  | 1029 | 1079 | 1129 | 1179 | 1229 | 1279 | 1329 | 1379 | 1429 | 1479 | 1529 | 1579 | 1629 |
| A         | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  |
| M         | 0    | 1    | 1    | 1    | 1    | 2    | 2    | 2    | 2    | 3    | 3    | 3    | 3    | 4    | 4    | 4    | 4    | 5    | 5    | 5    | 5    | 6    | 6    | 6    |
| N         | 4    | 6    | 6    | 6    | 6    | 8    | 8    | 8    | 8    | 10   | 10   | 10   | 10   | 12   | 12   | 12   | 12   | 14   | 14   | 14   | 14   | 16   | 16   | 16   |
| 质量KG(约重)  | 8.6  | 9.2  | 9.8  | 10.4 | 11   | 11.6 | 12.2 | 12.8 | 13.4 | 14   | 14.6 | 15.2 | 15.8 | 16.4 | 17   | 17.6 | 18.2 | 18.8 | 19.4 | 20   | 20.6 | 21.2 | 21.8 | 22.4 |
| 有效行程 (mm) | 1300 | 1350 | 1400 | 1450 | 1500 | 1550 | 1600 | 1650 | 1700 | 1750 | 1800 | 1850 | 1900 | 1950 | 2000 | 2050 | 2100 | 2150 | 2200 | 2250 | 2300 | 2350 | 2400 | 2450 |
| L         | 1679 | 1729 | 1779 | 1829 | 1879 | 1929 | 1979 | 2029 | 2079 | 2129 | 2179 | 2229 | 2279 | 2329 | 2379 | 2429 | 2479 | 2529 | 2579 | 2629 | 2679 | 2729 | 2779 | 2829 |
| A         | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  |
| M         | 6    | 7    | 7    | 7    | 7    | 8    | 8    | 8    | 8    | 9    | 9    | 9    | 9    | 10   | 10   | 10   | 10   | 11   | 11   | 11   | 11   | 12   | 12   | 12   |
| N         | 16   | 18   | 18   | 18   | 18   | 20   | 20   | 20   | 20   | 22   | 22   | 22   | 22   | 24   | 24   | 24   | 24   | 26   | 26   | 26   | 26   | 28   | 28   | 28   |
| 质量KG(约重)  | 23   | 23.6 | 24.2 | 24.8 | 25.4 | 26   | 26.6 | 27.2 | 27.8 | 28.4 | 29   | 29.6 | 30.2 | 30.8 | 31.4 | 32   | 32.6 | 33.2 | 33.8 | 34.4 | 35   | 35.6 | 36.2 | 36.8 |
| 有效行程 (mm) | 2500 | 2550 | 2600 | 2650 | 2700 | 2750 | 2800 | 2850 | 2900 | 2950 | 3000 | 3050 | 3100 | 3150 | 3200 | 3250 | 3300 | 3350 | 3400 | 3450 | 3500 | 3550 | 3600 | 3650 |
| L         | 2879 | 2929 | 2979 | 3029 | 3079 | 3129 | 3179 | 3229 | 3279 | 3329 | 3379 | 3429 | 3479 | 3529 | 3579 | 3629 | 3679 | 3729 | 3779 | 3829 | 3879 | 3929 | 3979 | 4029 |
| A         | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  | 200  | 50   | 100  | 150  |
| M         | 12   | 13   | 13   | 13   | 13   | 14   | 14   | 14   | 14   | 15   | 15   | 15   | 15   | 16   | 16   | 16   | 16   | 17   | 17   | 17   | 17   | 18   | 18   | 18   |
| N         | 28   | 30   | 30   | 30   | 30   | 32   | 32   | 32   | 32   | 34   | 34   | 34   | 34   | 36   | 36   | 36   | 36   | 38   | 38   | 38   | 38   | 40   | 40   | 40   |
| 质量KG(约重)  | 37.4 | 38   | 38.6 | 39.2 | 39.8 | 40.4 | 41   | 41.6 | 42.2 | 42.8 | 43.4 | 44   | 44.6 | 45.2 | 45.8 | 46.4 | 47   | 47.6 | 48.2 | 48.8 | 49.4 | 50   | 50.6 | 51.2 |